

**Karnataka Public Works Department**  
**Executive Engineer Office, Special Division**  
**Nazarbad, Mysore - 0821-2492297**

No. KEO: PWDVV: M: SE0-2 Building safety 2021-22

To,

The Principal,  
Mysore West Lions Sevaniketan School,  
P-3, 6<sup>th</sup> Cross, III Stage, Gokulam,  
Mysore.

Sir,

SUB: Regarding issuing Building Safety Certificate for Mysore West Lions Sevaniketan School.

Ref: 1. Letter Dated 22.10.2021 and 04.03.2022. Executive Engineer No. 2721-22 dated 21.03.2022

2. Executive Engineer PWD Mysore.

1. Special Division Mysore Letter No.1167 Dated 09/03/2022.


3. Govt. Notification No PWD:59: VED:2019: Bangalore dated 10.11.2021 and correction order dated 20.11.2021.

With reference to the above ref (2) Executive Engineer PWD office No.1 Special Branch, the school had applied for building Safety Certificate in the prescribed form.

The school was visited by the Executive Engineer on 05.03.2022 and certified that the building is safe.

This building has G + 2 floors and stair case as per NBC code 2016 with toilet and Drinking water facilities provided.

In continuation. Executive Engineer and PWD Office No.1, Special Sub Division Mysore has provided the strength concrete structure dated 10.01.2022. Karnataka Test House Pvt. Ltd. No 778/44, Gokul 1<sup>st</sup> Stage, 2<sup>nd</sup> Phase, 8<sup>th</sup> Cross, Triveni Road, Yeshwanthapura, Bangalore conducted a Non-destructive digital indicating tester through and Dr. Suresh (NS consultancy) B.E, Civil MIE., FIV., Structural Consultant

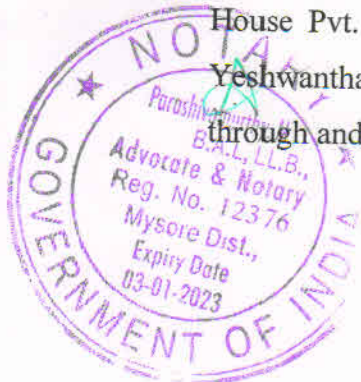

of Corrections

No.1906, 3<sup>rd</sup> Cross, 1<sup>st</sup> Main Road, 'K' Block, Kuvempunagar, Mysore-570023 conducted physical observation and accordingly necessary field test were conducted . It has been reported that the building is strong and stable.


Ultrasonic pulse velocity test for compressive strength of in-situ concrete columns, beams and slabs at critical points was conducted using PUNDIT 6 (Portable ultrasonic nondestructive digital indicating tester) by Karnataka Test House Pvt. Ltd. No. 778/44 Gokul 1<sup>st</sup> Stage, 2<sup>nd</sup> Phase, 8<sup>th</sup> Cross, Triveni Road, Yeshwanthapura. Bangalore.

Recognizance, visual inspection of Building cracks, distress, dampness etc was inspected by Dr. Suresh (NS consultancy) BE, Civil MIE., FIV., Structural Consultant No.1906, 3<sup>rd</sup> Cross, 1<sup>st</sup> Main Road, 'K' Block, Kuvempunagar, Mysore 570023 along with PWD department technical group has given the certification.

As per National Building code of India 2016 guidelines Dr. Suresh (NS consultancy) BE, Civil MIE., FIV., Structural Consultant No.1906, 3<sup>rd</sup> Cross 1<sup>st</sup> Main Road, 'K' Block, Kuvempunagar, Mysore 570023 has given the certification.

The institution as per the Govt. Order No. PWD:59: BED:2019: Bangalore dated 10.11.2021 and correction order dated 20.11.2021 has submitted the evaluation report duly certified to the office. As per evaluation 0.05% fee was paid through D.D No; 212910 BOB Gokulam, for Rs. 21624/- paid to treasury. After verification of all the documents and reports of Karnataka Test House Pvt. Ltd. No 778/44 Gokul 1<sup>st</sup> Stage, 2<sup>nd</sup> Phase, 8<sup>th</sup> Cross, Triveni Road, Yeshwanthapura, Bangalore and Dr. Suresh (NS consultancy) BE, Civil MIE., FIV., Structural Consultant No.1906, 3<sup>rd</sup> Cross 1<sup>st</sup> Main Road, 'K' Block, Kuvempunagar, Mysore - 570023 and H.T Vasudev, BE, (Civil) MIE, FIV., Chartered Engineer and Govt. Approved Value, Reg. No. CAT Vol. 1/302/95, it has been certified that the building is structurally stable.

Thanking You

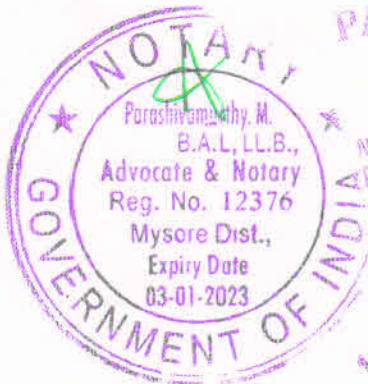

PARASHIVAMURTHY  
Advocate & Notary  
Mysore District  
Govt. of India  
No. 58, "Bose Nilaya" Behind Nirmithi Mandra,  
Begur 2nd Stage, Mysore-570 026.

No of Corrections..... 2/1

Executive Engineer

Public Works Department  
Special Branch Mysore

Translated From Kannada to  
English Verified & Found Correct

NOTARY, MYSORE DISTRICT

27/01/2022